


Polys P-1a 650W

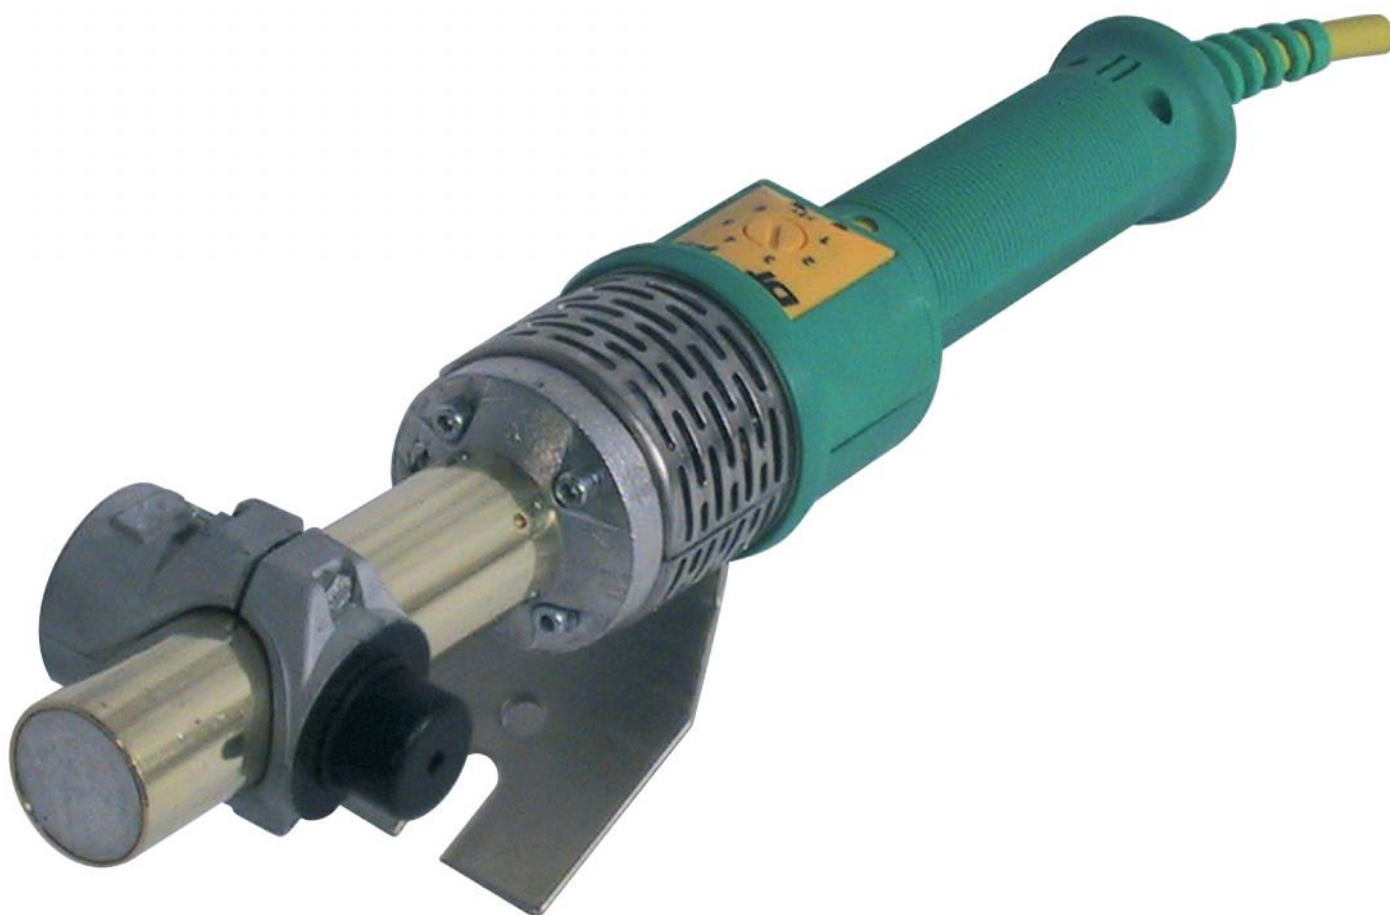

DYTRON s.r.o.
Toužimská 943/24a, 197 00 Praha 9 - Kbely, Czech
Tel.: +420-2-66190011-3, fax: +420-2-66190038
E-mail: sales@dytron.eu
<http://www.dytron.eu>

« - » 7/8
/ : (495) 150-0822
E-mail: info@adr-t.ru
<http://www.adr-t.ru>

	2
1.	3
2.	3
3.	4
4.	4
4.1	Polys P-1a 650W SOLO	4
4.2	SP-1a 650W MINI	4
4.3	SP-1a 650W HOBBY	4
5.	5
5.1	5
5.2	5
5.3	5
5.4	5
5.5	5
5.6	DYNO	5
6.	6
6.1	6
6.2	6
6.3	7
7.	7
8.	7
9.	8

1.

DYTRON –

2.

Polys P-1a 650W

Ø32

« »

(... 6.1).

3



1 2 3

180–280°C

(1)

(2)

(3)

5-7°

320°

3.

:
 :
 : 16-63
 : 650
 : 220 , 50
 :
 : ±7°C
 : 1,3

4.

Polys P-1a 650W



4.1 Polys P-1a 650W SOLO

•
 • (6-) 4
 • /
 • 1,6

4.2

SP-1a 650W MINI

•
 • (20, 25 6- 32) 4
 • ()
 • /
 • MINI
 • 5,1



4.3

SP-1a 650W HOBBY

•
 • (16, 20, 25 6- 32) 4
 • ()
 • DYNO Ø42
 • /
 • 6,4

5.

5.1

DIN.



63

Ø90

16-
Plate100

) 4

6-

5.2



-4 -1.



5.3



-4 -1.

5.4



5.5

-4 -1.

5.6

DYNO

40



6.

6.1



()

6.2



- (2)
- (3)

180–280°C

6 (1)

- 1...150–175°C
- 2...175–195°C
- 3...195–215°C
- 4...215–235°C
- 5...235–255°C
- 6...255–280°C

PN10,

260°C.

DN 40	+10
DN 50	+10
DN 63	+15
Plate 100	+10

– 260°C.

(3)

5-10

(1),

(3)

9.

1.		4.	
2.	24	5.	
3.		5.1.	.3.1.,
3.1.		5.2.	
		5.3.	
		5.4.	
3.2.		5.5.	
		5.6.	
		5.7.	
3.3.		6.	
		7.	
3.4.			.1.