

ST-160

/



DYTRON s.r.o.
Toužimská 943/24a, 197 00 Praha 9 - Kbely, Czech
Tel.: +420-2-66190011-3, fax: +420-2-66190038
E-mail: sales@dytron.eu
<http://www.dytron.eu>

« - »
7/8
: (495) 150-0822
E-mail: info@adr-t.ru
<http://www.adr-t.ru>

1	3
2	3
3	3
4 T	4
5	4
5.1	4
5.2	4
5.3	4
5.4	5
5.5	5
5.6	5
6	6
6.1	6
6.2	6
6.3	6
6.4	7
6.5	7
7	7
8	8
9	8

1

DYTRON –

2

ST-160

(Ø40–160)

(Ø40–110)

« » Ø160

Ø40–110

3

ST-160

:

4

- Ø 40
- Ø 50
- Ø 63
- Ø 75
- Ø 90
- Ø 110
- Ø 125
- Ø 140

(6-)



- Ø 40
- Ø 50
- Ø 63
- Ø 75
- Ø 90
- Ø 110



():



4 T

- : : Ø 40-110
- : : Ø 40-160
- : 1200
- : 550
- : 230 V, 50 Hz
- : 180-280°C
- : LCD
- : 60

5

5.1



2 1

(1)

(1)

(2)



5.2

(1)



5.3

5.4

10-15
(.5.2).



5.5



200-220°

5.6



6

6.1



6.2

(. . 5.1).

(. . 5.5).

260°C.

PN10,
!
260°C.



5-10

6.3



(. .).

(. .)

3

	40	50	63	75	90	110
	12	18	24	30	40	50
	6	6	8	8	8	10
	20	20	30	30	40	50

(PPRC).

6.4


P-4c

3 (PPRC)

(.)

(.2)

5

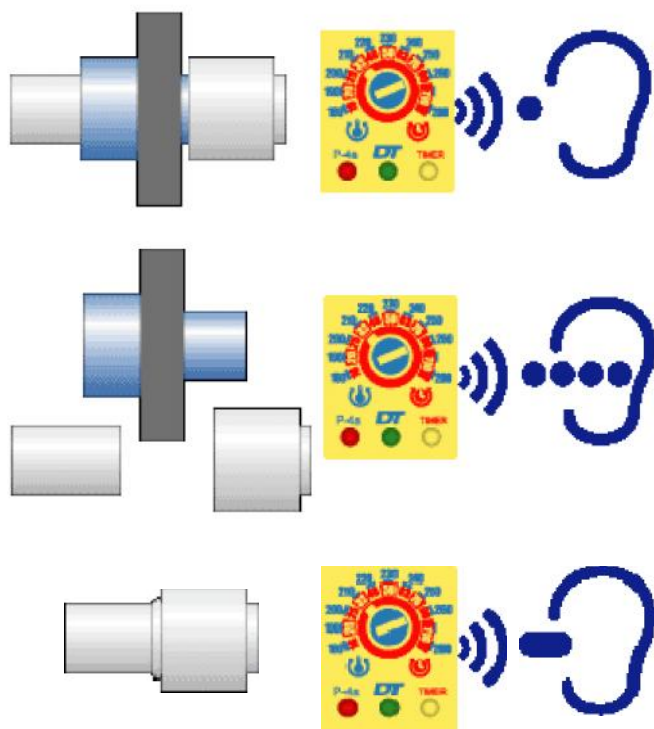

6.5



7

