

SM-410



CARDI

Cardi s.r.l.
via Leonardo da Vinci, 21, I-24030 Pontida (BG), Italy
Tel. +39 035 795029
Fax +39 035 796190
www.cardi.biz

**ADR
TECH**

« - »
/ : (495) 150-0822
www.adr-t.ru
E-mail: info@adr-t.ru

7/8

1	3
2	3
2.1	3
2.2	3
2.3	3
2.4	3
3	4
4	4
5	5
5.1	5
5.2	6
5.3	7
5.3.1	7
5.3.2	7
5.3.3	7
5.3.4	PRCD	7
5.3.5	7
5.4	8
5.5	8
5.5.1	8
5.5.2	9
6	9
7	9
7.1	9
7.2	9
8	10
9	10

1

SM-410 –



SM-410

-
-
-
-
-
-
-
-

				CARDI s.r.l. Via Leonardo Da Vinci, 21 24030 - Pontida (BG) - Italy	
SM-410-EL					
3000 W	230 V~	14 A	50 + 60 Hz		
n ₀ /min	n/min	Ø MAX			
2500	1650	400 mm			
Serial n.: xxxxxxxx					
Ma	EU	2008			

2




2.1

2.2

2.3

2.4

3

	SM-410
	230
	50÷60
	14
	3000
	2500
	1650
	1820
	17
	2060
	12,9
	
PRCD (personal residual current device)	
	
	400
	3,0 ¹⁾
	158
	25,4
	12,5
	E.P. 68÷150 cST ., ESSO Spartan E.P.68 ESSO Spartan E.P.150
	30

1)

4

Cardi s.r.l.

- EN 292-1,-2, EN 60745-1, EN 55014
- ✓ 2006/42/EC ✓ 2002/96/EEC
- ✓ 2006/95/EC ✓ 2002/95/EEC
- ✓ 2004/108/EEC

EN 60745-1

85

93

104

<2,5 /².

Ezio Cattaneo



5

5.1

SM-410

(2-3), (400), (25,4),
/ 2530 ./)





3,0 SM-410.

3,2 Ø400 3,2

.5.4.

()

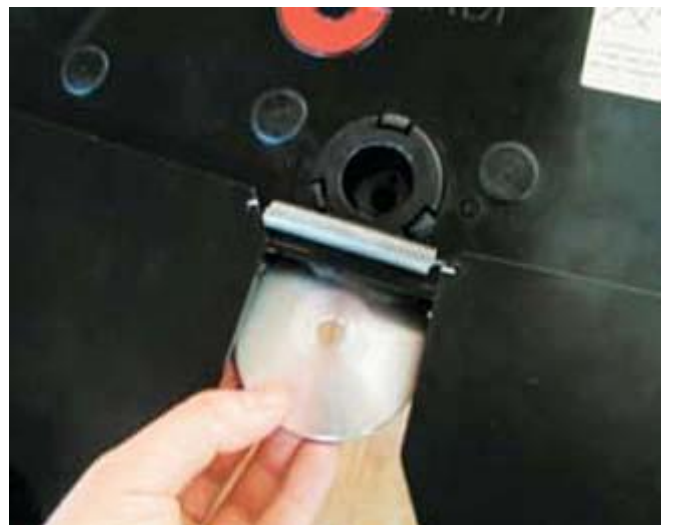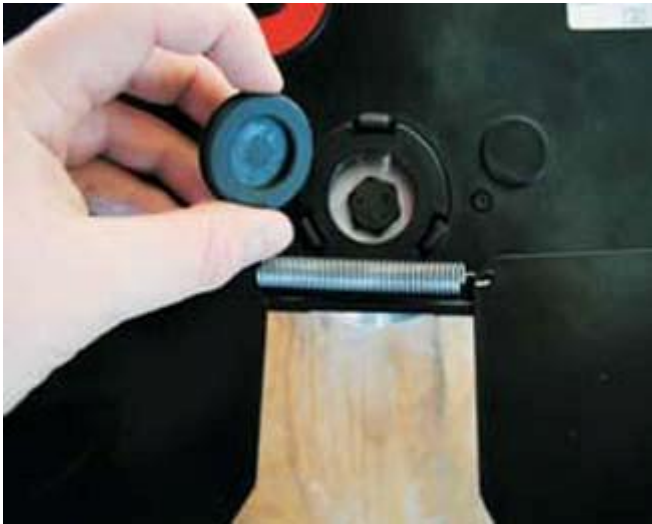



5.2



SM-410

1/2"

- 4 (4).
-
-
-
- - IP 55, . . .



5.3

5.3.1

SM-410

1-

220÷230 , 50-60



30%

210-240

5.3.2

25 -
25 -

4,0²;
6,0².



5.3.3

SM-410



5.3.4

PRCD

SM-410

PRCD (personal residual current device),

PRCD.

«RESET».

«TEST».

PRCD



«RESET»



PRCD

PRCD

«TEST»

PRCD,

PRCD,



PRCD

5.3.5

-
-

»

2-3



«



5.4

SM-410

2

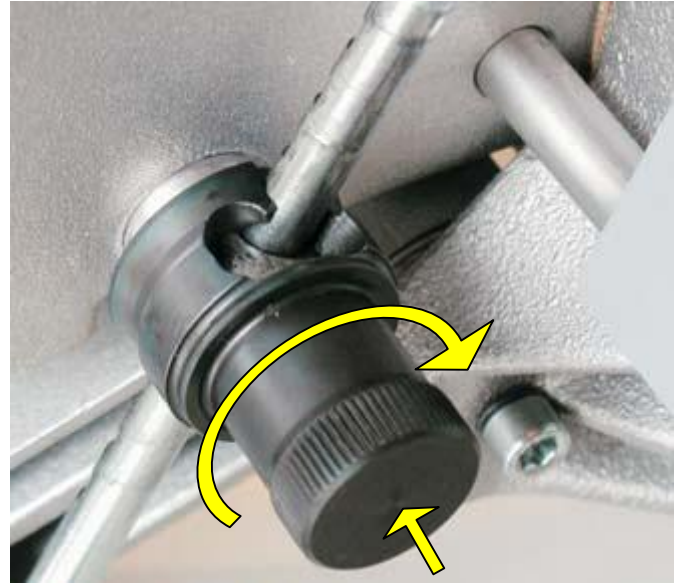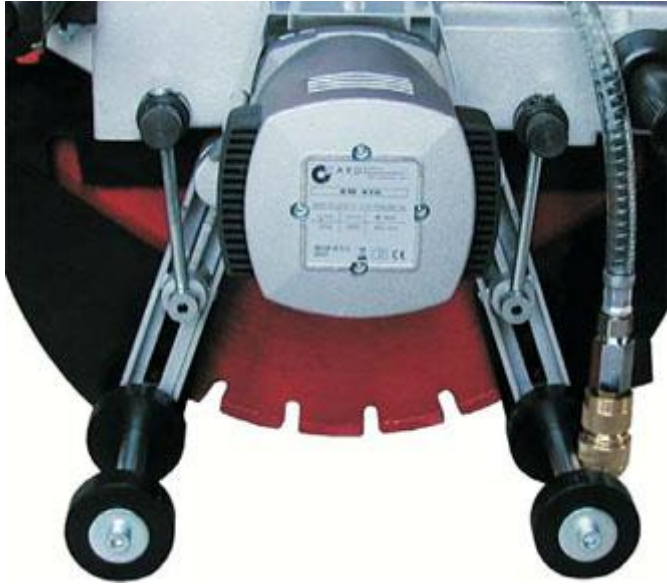


5.5

5.5.1

SM-410

- 1.
- 2.

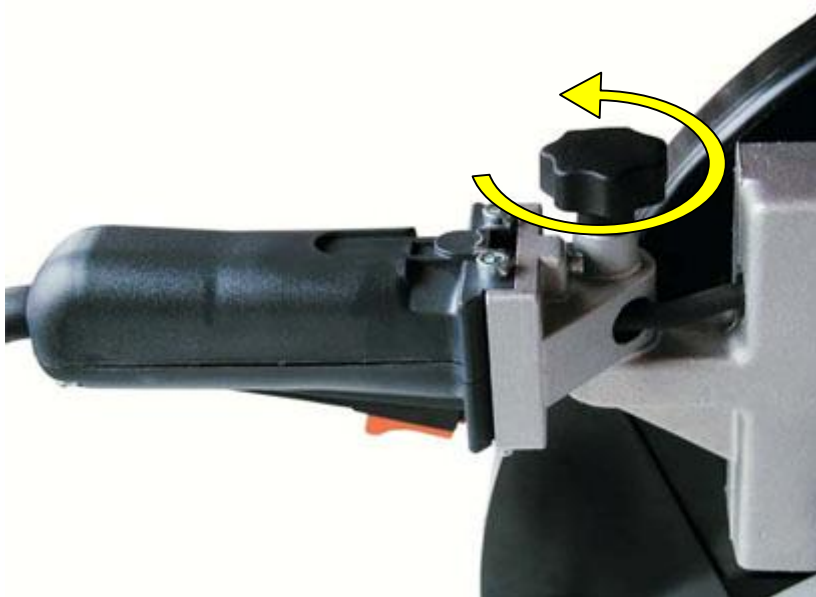

5.5.2

SM-410



6



-
-
-
-
-
-
-
-
-



)

()

(.5.3.5).

2-3

SM-410

(

7

7.1

SM-410

7.2

SM-410

(2-3)

8



250

Cardi.

Cardi,

9

1.

24

2.

3.

3.1.

Cardi.

Cardi

3.2.

3.3.

6

3.4.

4.

5.

5.1.

.3.1.,

5.2.

5.3.

5.4.

5.5.

5.6.

5.7.

6.

7.

.1.