

Polys P-4a 850W TraceWeld



1	3
2	3
3	4
4	4
4.1	Polys P-4a 850W TraceWeld SOLO	4
4.2	SP-4a 850W TraceWeld MINI	4
4.3	SP-4a 850W TraceWeld PROFI.....	4
5	5
5.1	5
5.2	5
5.3	5
5.4	5
5.5	5
5.6	5
6	6
6.1	6
6.2	6
6.3	6
6.4	7
7	7
8	8
9	8

1

DYTRON –


2

Polys P-4a 850W TraceWeld



« »
2

TraceWeld –

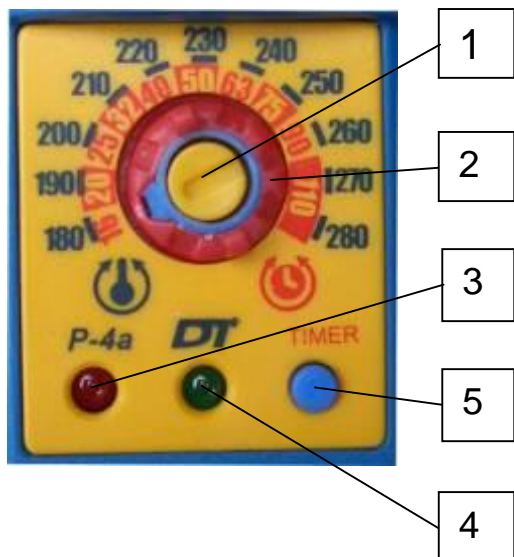

180-280°
(1).

(2).

Ø16).

TIMER (5).

(3)

(4)

3

: : 16-75
 : : 850
 : : 220 , 50
 : : ±1,5°C
 : : 1,6

4

Polys P-4a 850W TraceWeld :



4.1 Polys P-4a 850W TraceWeld SOLO

• (6-) 6
 •
 • /
 •
 • 2,0

4.2

SP-4a 850W TraceWeld MINI

• (6-) 6
 • 20, 25 32 ()
 •)
 • DYNO
 •
 • /
 • MINI
 • 6,0



4.3

SP-4a 850W TraceWeld PROFI

• (6-) 6
 • 16,20,25,32,40,50 63
 • ()
 • DYNO
 • /
 • 7,7

5

5.1



DIN.

16-125

Polys P-4a 850W TraceWeld
(6-) 6

16-75



5.2

-4 -1.



5.3

-4 -1.

5.4



5.5

-4 -1.

5.6

40



6



6.1



- 6.2
- 1
 - 2
 - 3
 - 4
 - 5

260°C.

5-10

(1),

(4)

6.3

	16	20	25	32	40	50	63	75
	5	5	7	8	12	12	24	30
	4	4	4	6	6	6	8	8
	6	6	10	10	20	20	30	30
	2	2	2	4	4	4	6	6

3 (PPRC).


/

6.4

TraceWeld

(2)

(— 32).

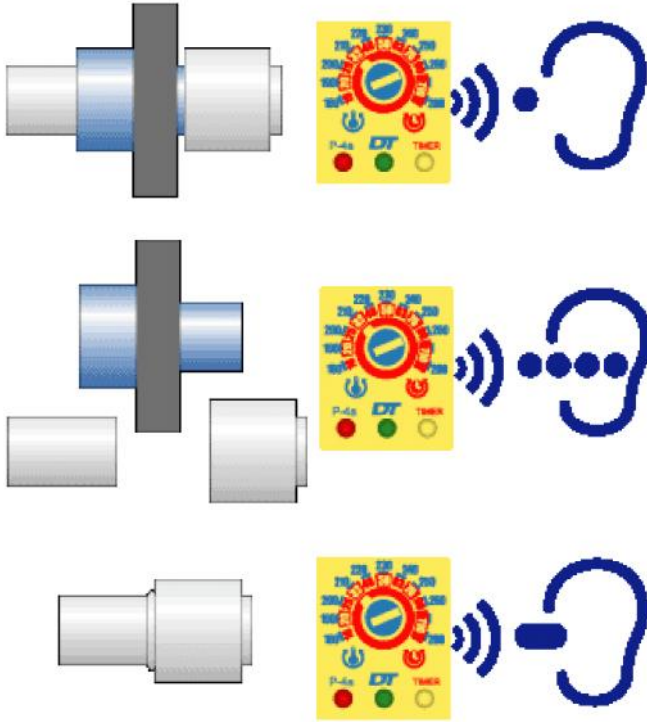

TIMER (5).

7

DYTRON s.r.o.

No.22/97 Sb.

168, 169, 170 and 173/97.

-
-
-
-
-
-
-
-
-
-
-
-
-
-

/

/

331600,

3-

1

3-

8

DYTRON.

9

