


# T2200 130-MU-EL T2200 130-ME-EL

1-

/

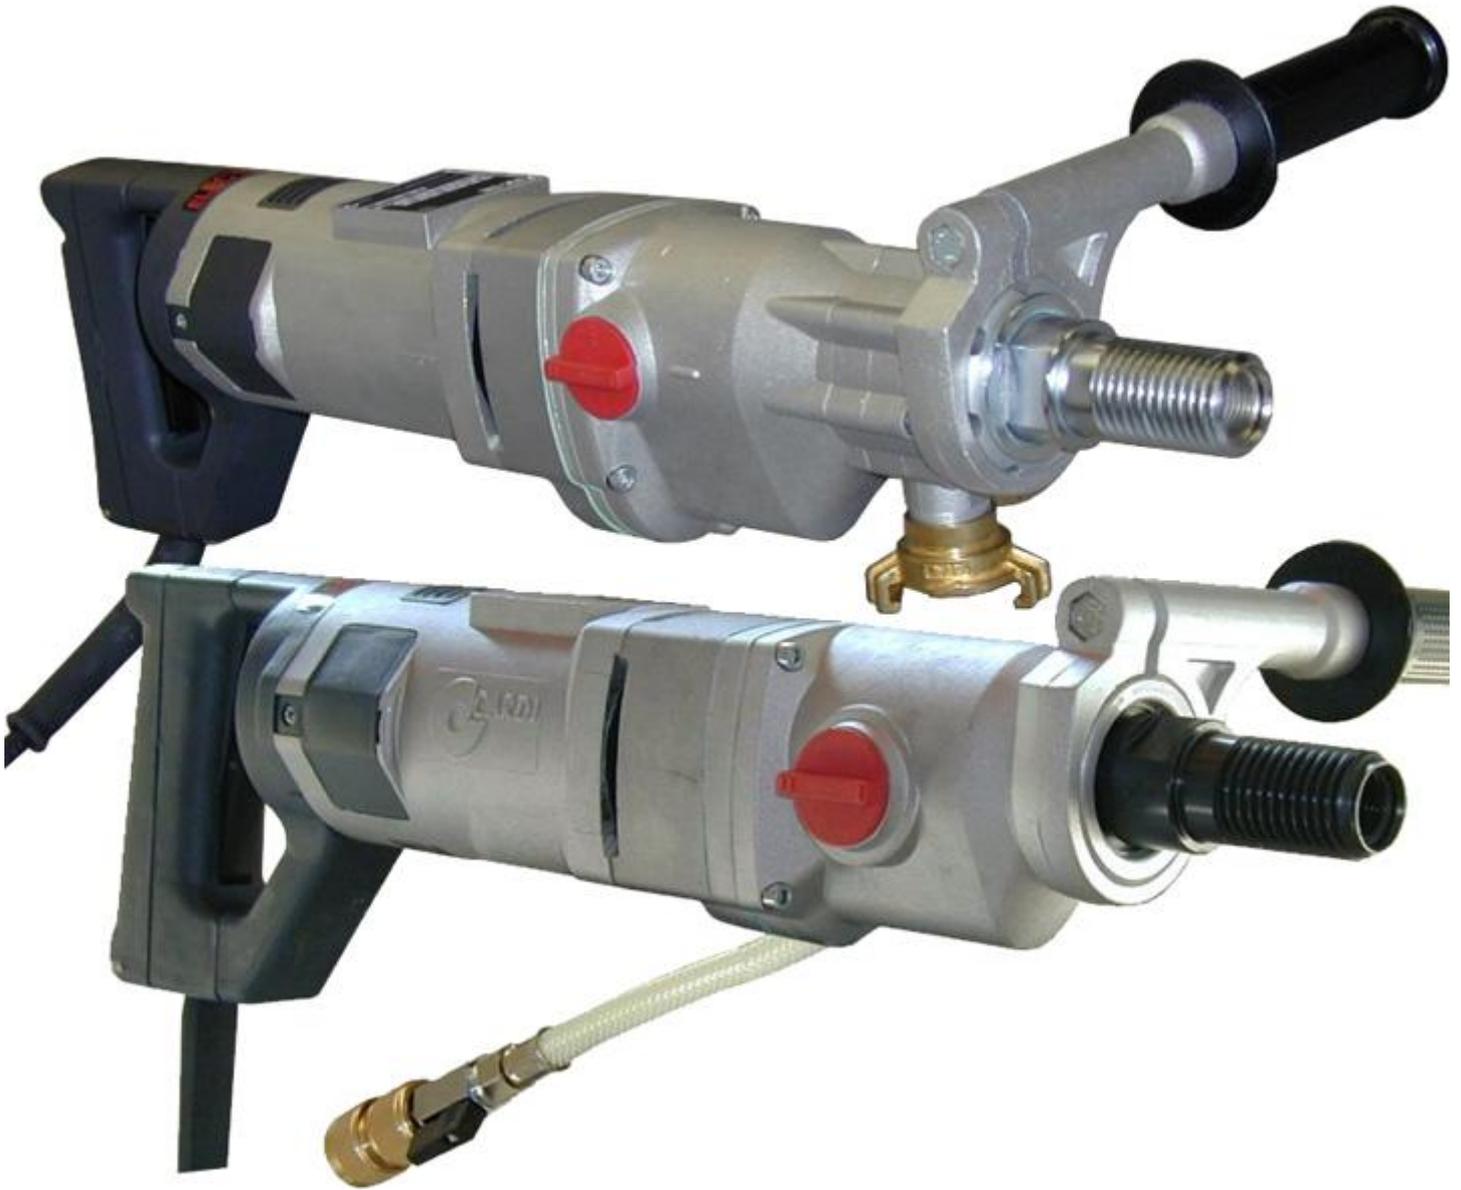

 CARDI

Cardi s.r.l.  
via Leonardo da Vinci, 21, I-24030 Pontida (BG), Italy  
Tel. +39 035 795029  
Fax +39 035 796190  
www.cardi.biz

 ADR  
TECH


ADR  
TECH  
« - »  
/ : (495) 150-0822  
www.adr-t.ru  
E-mail: info@adr-t.ru

1	.....	3
2	.....	3
2.1	.....	3
2.2	.....	3
2.3	.....	3
2.4	.....	3
2.5	.....	3
3	.....	4
4	.....	4
5	.....	5
5.1	.....	5
5.1.1	.....	5
5.1.2	.....	5
5.2	.....	7
5.2.1	.....	7
5.2.2	.....	7
5.2.3	.....	7
5.2.4	PRCD .....	7
5.2.5	.....	7
5.3	.....	8
5.4	.....	8
6	.....	9
6.1	.....	9
6.2	.....	9
7	.....	10
7.1	.....	10
7.2	.....	10
8	.....	10
9	.....	11

1

T2200 130-MU-EL

T2200 130-ME-EL

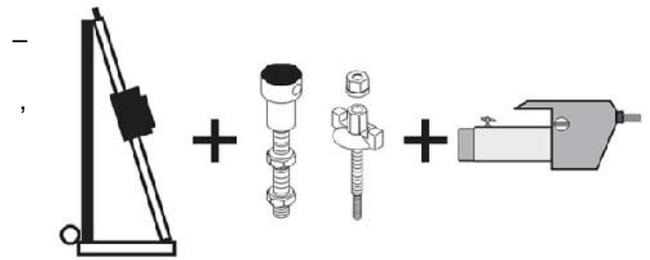

- T2200 130-MU-EL -
- T2200 130-ME-EL -

- 
- 
- 
- 
- 
- 
- 
- 

**CARDI** CARDI s.r.l.  
Via Leonardo Da Vinci, 21  
24030 - Pontida (BG) - Italy

**T2200-130 ME-EL**

2200 W	230 V~	10 A	50 ÷ 60 Hz
n <sub>0</sub> /min	n/min	∅ mm	
I	790	560	180 ÷ 100 130 ÷ 70
II	1440	1030	100 ÷ 40 70 ÷ 40
Serial n.: [Matricola]			

Made In E.U. (2013)

2

2.1

2.2


2.3

« »

2.4

2.5

3

	T2200 130-MU-EL T2200 130-ME-EL
	230
	50÷60
	10
	2200
	790-1400
	560-1030
	1260
	21,3-9,3
	11,5
	1470
	27,5-14,9
	
	
PRCD (personal residual current device)	
	
	35-150
	35-180
	6,0
	15
	E.P. 68÷150 cST ., ESSO Spartan E.P.68 ESSO Spartan E.P.150
	65
	Ø60
1)	1 ¼" UNC + ½ G

1) 2013 . ½ G T2200 130-ME-EL,

- :  
- 1 ¼ UNC,  
- ½ G,

4

Cardi s.r.l.

- |                 |                |
|-----------------|----------------|
| ✓ IEC 61029-1   | ✓ 2006/42/EEC  |
| ✓ IEC 61029-2-6 | ✓ 2006/95/EEC  |
| ✓ EN 61029-1    | ✓ 2004/108/EEC |
| ✓ EN 61029-2-6  | ✓ 2002/96/EEC  |
| ✓ EN 55014      | ✓ 2002/95/EEC  |
| ✓ EN 12348      |                |

. EN 61029-1 85 . 91 , 104 , <2,5 /<sup>2</sup>.  
Ezio Cattaneo 

5

5.1

5.1.1


- Ø80 ;
- 400 .

T2200 130-MU-EL ( T2200 130-ME-EL)



( )

( ),

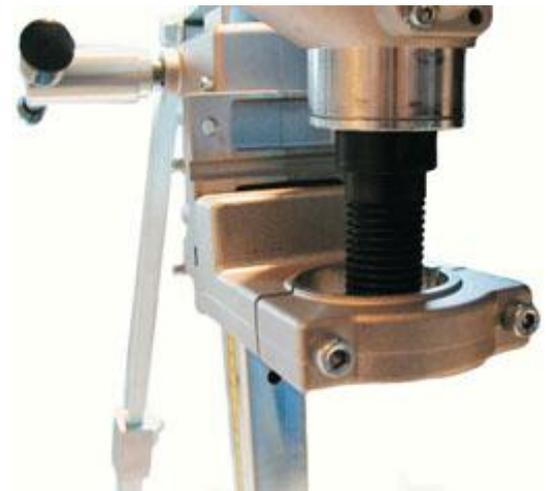

Cardi.

(

5.1.2



T2200 130-ME-EL:



**T2200 130-MU-EL:**

( ),



**T2200 130-ME-EL:**

1/2".



**T2200 130-MU-EL:**

1/2".



4 ( 4 ).

– IP 55, . . .

10	2
20-52	3
62-72	4
82-102	5
107-132	6
142-152	7
162-172	8
182-200	9
212-232	10
250	12
300	14
350-400	19
500-600	24

5.2

5.2.1

T2200 130-MU-EL T2200 130-ME-EL

1-

220 , 50÷60

30%

210-240

5.2.2

60 - 2,5 2;  
60 - 4,0 2.



5.2.3

( )

5.2.4 PRCD

device),

PRCD (personal residual current

PRCD.

«RESET».

«TEST».

PRCD

«RESET»



PRCD

PRCD

«TEST»

PRCD,

PRCD

PRCD,

5.2.5

•  
•  
« »

2-3



5.3


- 
- T2200 130-MU-EL T2200 130-ME-EL  
1 1/4" ( ) 1/2" ( ).
- 1 1/4" ( )
- 
- 



5.4


2÷6 / .

« »,

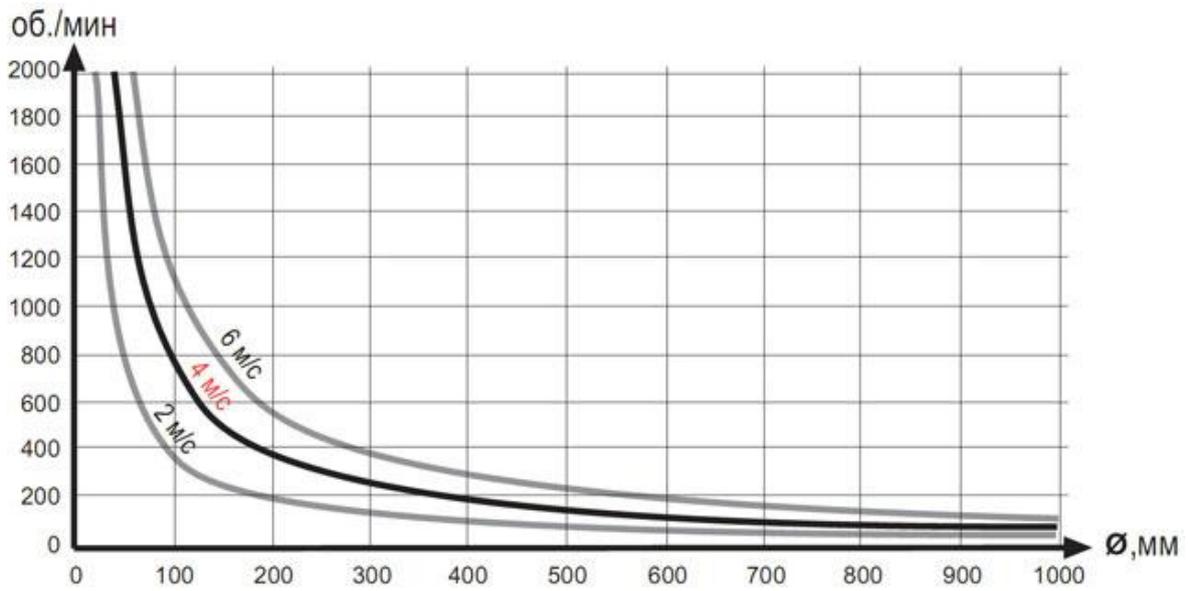

( . .1)

( )

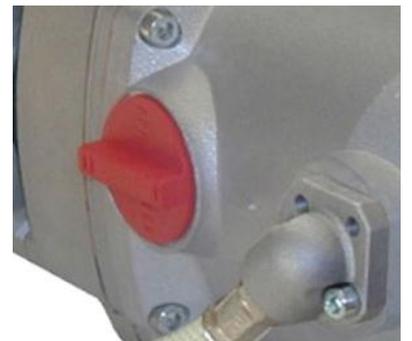

6

[Redacted]

( )

[Redacted]



[Redacted]

6.1

• ( . .5.1.2).

• ( . .5.2.4 5.2.5).

1

6.2

• ( . .5.2.5).

7

7.1

T2200 130-MU-EL T2200 130-ME-EL

( 2-3 )

( .5.2.5).

7.2

T2200 130-MU-EL T2200 130-ME-EL

«0».

6-



( .5.2.5).

8

250

Cardi.

( ., ).

Cardi,

9

1. 24

2.

3.

3.1. Cardi. Cardi

3.2. -

3.3. 6

3.4.

4.

5.

5.1. .3.1.,

5.2.

5.3.

5.4.

5.5.

5.6.

5.7.

6.

7.

.1.